



# MSR Gold™ FastFit

## MSR Gold™ 1500/1 FastFit 1CT/4

All lamps burn out eventually, but when this happens with single ended MSR Gold™ FastFit, it is replaced in seconds – thanks to the specially designed lamp base and lamp holder. This lamp provides a high beam intensity of pure, white light for a truly illuminating performance, while the gold-plated caps provide superior heat protection and prevent premature failure. P3 technology allows use in any position and at higher temperatures, further extending lamp life and consistency of high-quality light output. Also, because the FastFit design is applied to Philips Halogen lamps, switching between lamp technologies can be done quickly and easily. The Philips MSR Gold™ FastFit can be operated in a lamp wattage range between 700W and 2500W.

### Product data

GeniPubl	
PGJX50   PGJX50	PGJX50 [ PGJX50]
UNIVERSAL   Any or Universal (U)	UNIVERSAL [ Any or Universal (U)]
Entertainment	Entertainment
750 h	750 h
FastFit	FastFit
LittPubl	
1	1
114750 lm	114750 lm
127500 lm	127500 lm
328	328
334	334
5700 K	5700 K
85 lm/W	85 lm/W
92	92
95	95

85	85
ElecPubl	
1500.0 W	1500.0 W
15.3 A	15.3 A
198 V	198 V
CntrPubl	
Yes	Yes
MechPubl	
PGJX50	PGJX50
LDRPubl	
950 °C	950 °C
500 °C	500 °C


# MSR Gold™ FastFit

ProductPubl	
871869640275700	871869640275700
MSR Gold™ 1500/1 FastFit 1CT/4	MSR Gold™ 1500/1 FastFit 1CT/4
8718696402757	8718696402757
928108905115	928108905115
1	1

4	4
928108905115	928108905115
0.133 kg	0.133 kg

## Warnings and Safety


## Dimensional drawing




MSR GOLD 1500/1 FastFit

Product	D (max)	O	L (min)	L (max)	L	C (max)	F
MSR Gold™ 1500/1 FastFit 1CT/4	28 mm	6.3 mm	64 mm	66 mm	65 mm	128 mm	50 mm

## Photometric data

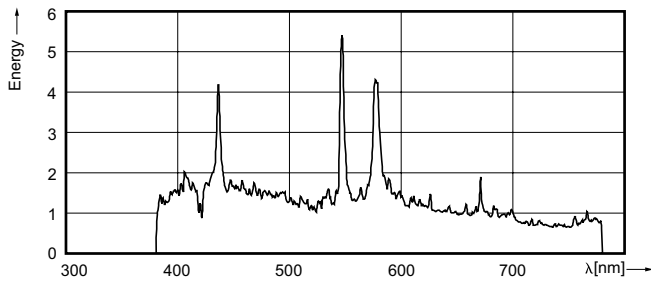

XDPB\_XDMSR\_0002-Spectral power distribution B/W

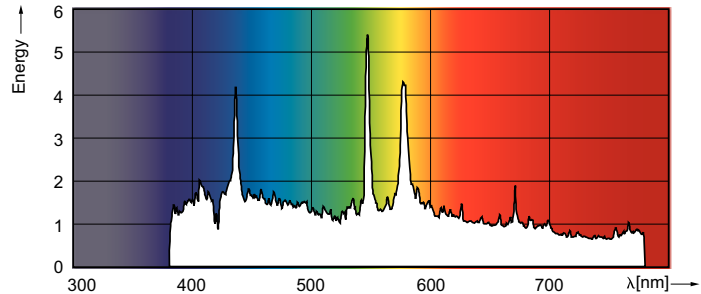

XDPO\_XDMSR\_0002-Spectral power distribution Colour

