


Proximity Reflector Lamps - LRP™

Our DR. FISCHER Proximity Reflector Lamp (LRP™) is the optimum infrared halogen technology for your industrial applications. This proximity reflector uses and precisely focuses 100% of the radiation of the lamp on specific areas. The electricity consumption is reduced up to 40% compared to traditional infrared halogen emit-

ters. Our DR. FISCHER Proximity Reflector Lamp (LRP™) is easy to install with its Plug&Play mechanism, and gives the best zoning accuracy currently available on the market.

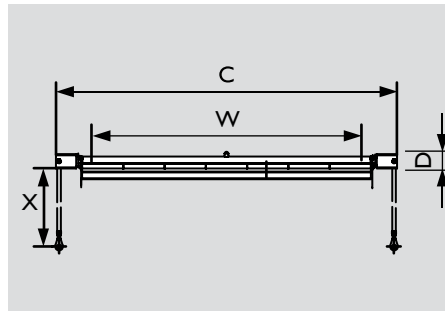

**DR. FISCHER LRP™ lamps
short waves**

Average lifetime | 5,000 hours

Type #	Watt	Volt	Comments	Total length mm (C)	Heating length mm (W)	Base	Bulb diameter mm (D)	Colour temp. K	Burning position	Cable (X)	Terminal	Qty box (pc)	Order #	Applications
14231 /LRP-SW	1,000	235	LRP V119	355.0	280.0	SK15s-21	9.9	2,500	Horiz.	310/310 insulated white	splice	10	9245 957 44916	All
14232 /LRP-SW	1,500	235	LRP V119	355.0	280.0	SK15s-21	9.9	2,350	Horiz.	310/310 insulated white	splice	10	9245 958 44916	All
14192 /LRP	1,700	235	LRP V119	355.0	280.0	SK15s-21	9.9	2,700	Horiz.	230/230 insulated white	splice	10	9245 833 44916	
14222 /LRP	1,700	235	LRP V114	355.0	280.0	SK15s-21	9.9	2,700	Horiz.	230/230 insulated white	splice	10	9245 930 44916	
14233 /LRP-SW	1,700	235	LRP V119	355.0	280.0	SK15s-21	9.9	2,700	Horiz.	310/310 insulated white	splice	10	9245 959 44916	All
14214 /LRP	2,000	400	LRP V219	382.0	306.0	SK15s-21	9.9	2,600	Horiz.	230/230 insulated white	splice	10	9245 903 49116	
14215 /LRP	2,000	400	LRP V214	382.0	306.0	SK15s-21	9.9	2,600	Horiz.	230/230 insulated white	splice	10	9245 904 49116	
14224 /LRP	2,000	235	LRP V114	355.0	280.0	SK15-21	9.9	2,500	Horiz.	160/160 double insulated	ring	10	9245 943 44916	
14225 /LRP	2,000	235	LRP V119	355.0	280.0	SK15-21	9.9	2,500	Horiz.	160/160 double insulated	ring	10	9245 944 44916	
14234 /LRP-SW	2,000	235	LRP V119	355.0	280.0	SK15s-21	9.9	2,500	Horiz.	310/310 insulated white	splice	10	9245 960 44916	All
14236 /LRP-SW	2,000	400	LRP V119	355.0	284.0	SK15s-21	9.9	2,700	Horiz.	300/300 insulated white	splice	10	9245 962 49116	All
14237 /LRP-SW	2,500	400	LRP V119	355.0	287.0	SK15s-21	9.9	2,700	Horiz.	300/300 insulated white	splice	10	9245 963 49116	All
14226 /LRP	3,000	235	LRP V114	355.0	278.0	SK15-21	9.9	2,650	Horiz.	160/160 double insulated	ring	10	9245 945 44916	
14227 /LRP	3,000	235	LRP V119	355.0	278.0	SK15-21	9.9	2,650	Horiz.	160/160 double insulated	ring	10	9245 946 44916	
14235 /LRP-SW	3,000	235	LRP V119	355.0	278.0	SK15s-21	9.9	2,650	Horiz.	310/310 insulated white	splice	10	9245 961 44916	
14238 /LRP-SW	3,000	400	LRP V119	355.0	280.0	SK15s-21	9.9	2,650	Horiz.	300/300 insulated white	splice	10	9245 964 49116	All

For custom solutions (base, watt, volt, applications...), please contact us.