



MSR Gold™ SA Double Ended

MSR Gold™ 1200 SA/2 DE 1CT/4

To optimize the total lifetime of the double ended MSR Gold™ SA Double Ended lamps, the caps are plated with gold. This provides superior heat protection and thereby minimizes premature failure of the lamp and lamp holder, as well as ensuring extended consistent performance. In addition, the highly innovative P3 technology, developed by Philips, allows the lamp to be used at higher temperatures, which further extends service life and consistency of high-quality light output.

Product data

General Information	
Cap-Base	SFC10-4 [SFC10-4]
Operating Position	UNIVERSAL [Any or Universal (U)]
Main Application	Entertainment
Life to 50% Failures (Nom)	750 h
System Description	SA/2 DE

Light Technical	
Color Code	- [Not Specified]
Luminous Flux (Min)	90000 lm
Luminous Flux (Nom)	100000 lm
Chromaticity Coordinate X (Nom)	301
Chromaticity Coordinate Y (Nom)	316
Correlated Color Temperature (Nom)	7500 K
Luminous Efficacy (Rated) (Min)	75 lm/W
Luminous Efficacy (rated) (Nom)	83 lm/W
Color Rendering Index (Nom)	85

Operating and Electrical	
Power (Nom)	1200 W
Lamp Current (Nom)	13.6 A
Ignition Supply Voltage (Min)	198 V

Controls and Dimming	
Dimmable	No

Mechanical and Housing	
Cap-Base Information	SFC10-4


Product Data	
Full product code	871829122107400
Order product name	MSR Gold™ 1200 SA/2 DE 1CT/4
EAN/UPC - Product	8718291221074
Order code	928175305115
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4

MSR Gold™ SA Double Ended

Material Nr. (12NC)	928175305115
Net Weight (Piece)	34.000 g

Warnings and Safety


Dimensional drawing

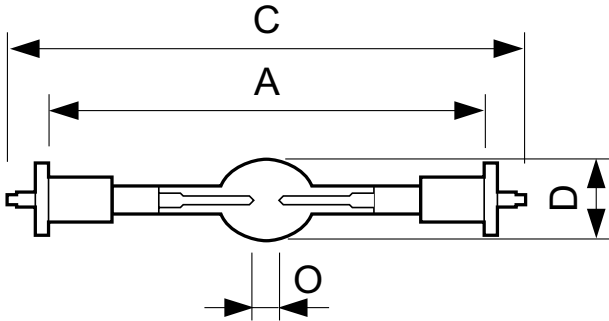


MSR GOLD 1200 SA/2 DE

Product	D (max)	O	A (min)	A (max)	A	C (max)
MSR Gold™ 1200 SA/2 DE 1CT/4	22 mm	7.0 mm	114.4 mm	115.2 mm	114.8 mm	136 mm

Photometric data



XDPB_XDMSR_1200W_SA2-DE-Spectral power distribution B/W



XDPO_XDMSR_1200W_SA2-DE-Spectral power distribution Colour

